

FIG. 1

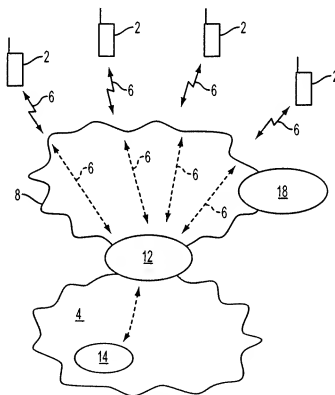


FIG. 2

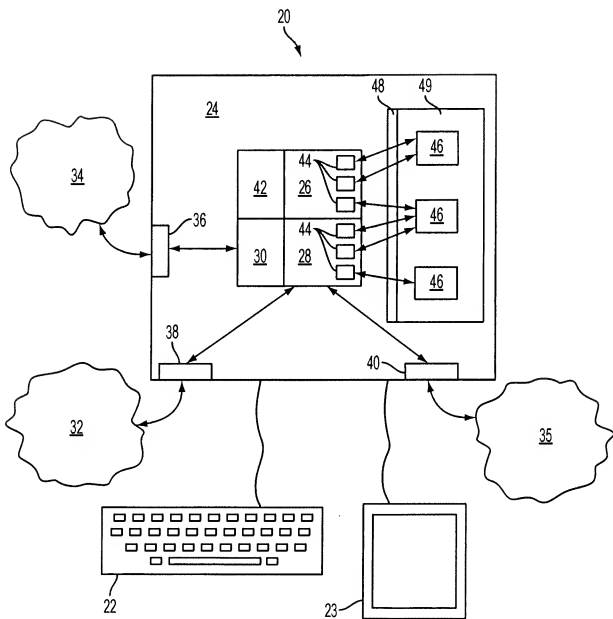


FIG. 3

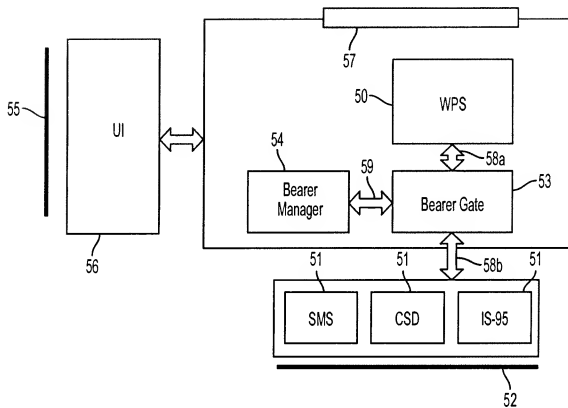


FIG. 4

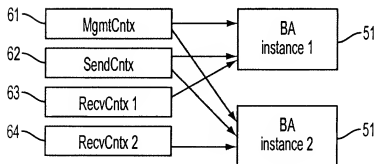


FIG. 5

Bearer adapter management NOKIA

Name	Type	Status	Quality of service
Radiolinja	Nokia_CIMD_10	stopped	N/A?

Start/Stop Configure... Create new... Remove

Help Close

FIG. 6a

Radiolinja configuration

Status Quality of service

General Information

Properties General options Statistics

Name	Value
MaxAckTimerExpirations	5
MaxReceiveAddressLength	1024
MaxReceiveBufferLength	8192
MaxRetransmissions	4
MaxSendAddressLength	1024
MaxSendBufferLength	8192
SMSDriverAliveTime	180000
SMSDriverAliveTimeout	60000

Information about the property

OK Cancel Copy Help

FIG. 6b

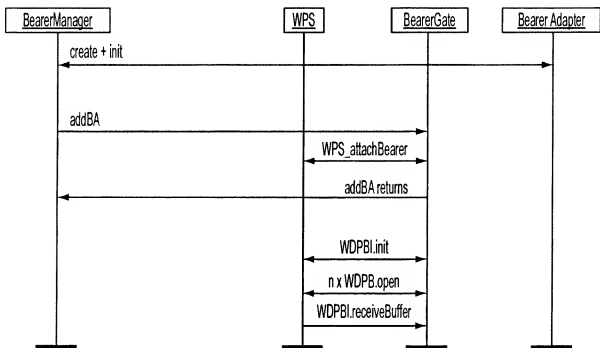


FIG. 7a

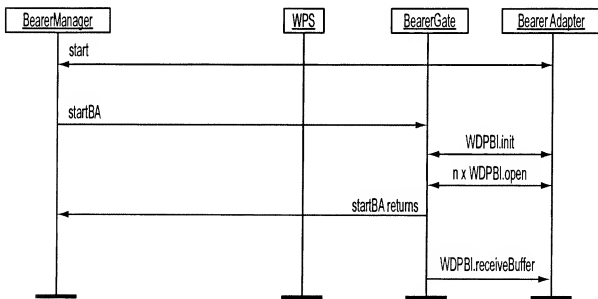


FIG. 7b

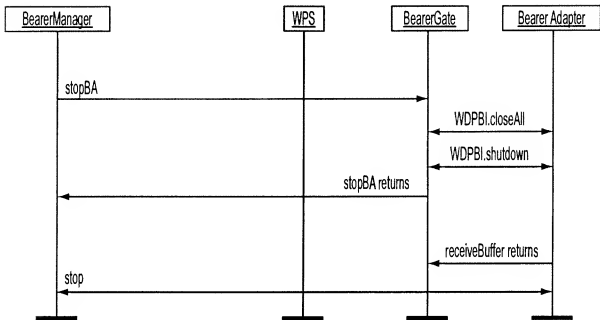


FIG. 7c

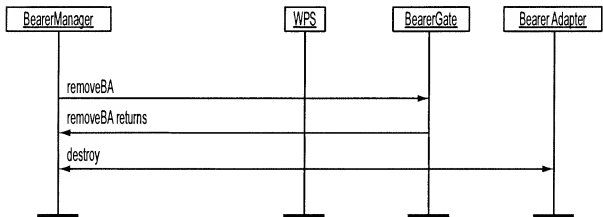


FIG. 7d